

## LC Duplex Adapter blue, SM, without flange

Art.No.: 53515.1

Singlemode LC/LC Duplex adapter, plastic housing blue, ceramic sleeve, blue dust cap.

### Specification

Sleeve Material	CERAMIC
Typical Insertion Loss, dB	0.1
Max Insertion Loss, dB	0.2
Durability(1000 Mating)	0.2dB Max.Increase
Operating Temperature, °C	-40 ~ +85
Storage Temperature, °C	-40 ~ +85

The performance of the adaptors has been carefully designed to meet the toughest Telcordia standards




### GR-326-CORE

### RoHS-Compliance of item and package

### Conformance according to IEC 61754-20

in the tests of:

- OPTICAL CHARACTERISTICS
- VIBRATION TEST
- THERMAL CYCLING
- IMPACT RESISTANCE
- SALT SPRAY EROSION
- THERMAL AGING
- HUMIDITY RESISTANCE
- OTHERS

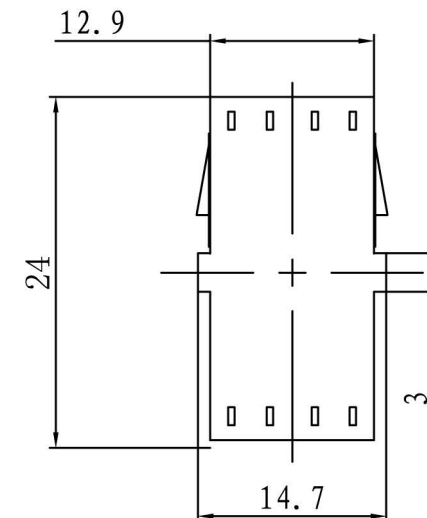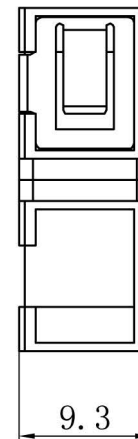

RoHS  
compliant

Created BT	Date 17.05.13
Last rev. BT	Date 17.05.13

**LC Duplex Adapter blue,  
SM, without flange**  
Art.No.: 53515.1

File: 53515.1.pdf

